


パンチング

パンチングティ




スタンダードタイプ

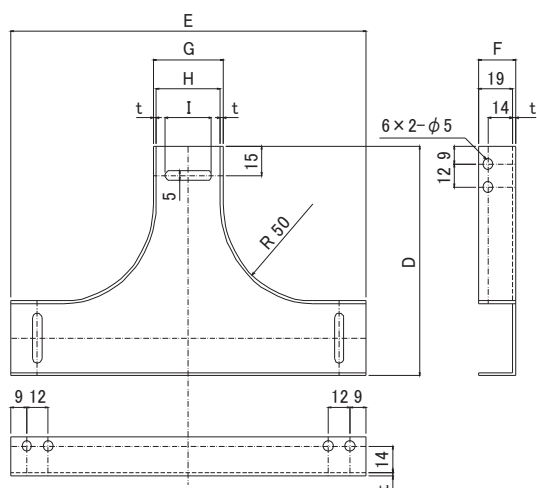

	型 式	t (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
鉄	T-35	1.6	119.2	199.2	20.6	39.2	36	26
	T-60	1.6	144.2	224.2	20.6	64.2	61	52
	T-100	1.6	184.2	264.2	20.6	104.2	101	92
	T-150	1.6	234.2	314.2	20.6	154.2	151	92
ステン レス	T-35-S	1.2	118.4	198.4	20.2	38.4	36	26
	T-60-S	1.2	143.4	223.4	20.2	63.4	61	52
	T-100-S	1.2	183.4	263.4	20.2	103.4	101	92
	T-150-S	1.2	233.4	313.4	20.2	153.4	151	92

リベットタイプ

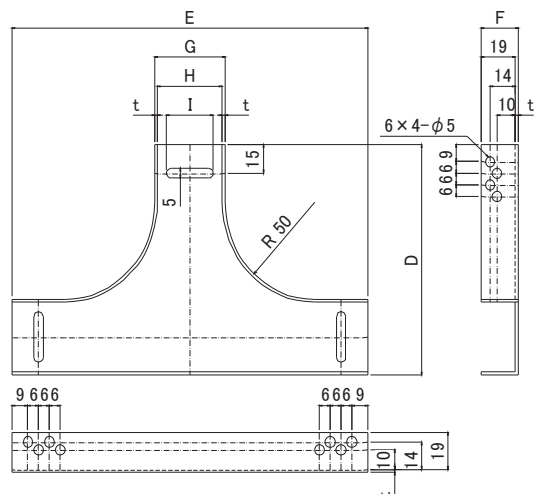

	型 式	t (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
鉄	T-35-R	1.6	119.2	199.2	20.6	39.2	36	26
	T-60-R	1.6	144.2	224.2	20.6	64.2	61	52
	T-100-R	1.6	184.2	264.2	20.6	104.2	101	92
	T-150-R	1.6	234.2	314.2	20.6	154.2	151	92
ステン レス	T-35-S-R	1.2	118.4	198.4	20.2	38.4	36	26
	T-60-S-R	1.2	143.4	223.4	20.2	63.4	61	52
	T-100-S-R	1.2	183.4	263.4	20.2	103.4	101	92
	T-150-S-R	1.2	233.4	313.4	20.2	153.4	151	92